

FS-Series

LED-backlit Display 27" | 24"

Borderless Design for Viewing More



The 3-sided narrow bezel FS-Series is crafted with comfort and efficiency in mind for viewing more. The ergonomically-designed stand coming with a wide viewing angle brings convenience, comfort, and consistent colour performance for multiple users both at the workplace and in the home.






More Screen Space, Wider Viewing Angle

Offering more screen space to accommodate greater images, the 3-sided narrow-bezel FS-Series caters to users either as stand-alone displays or multi-display setups. Given a wide (178°) viewing angle, it allows multiple users to comfortably share a single display at the same time.

Maximized Comfort and Efficiency

An ergonomically-designed stand makes it possible to configure your workstation and create a working environment the way you want it. For comfort, convenience, and efficiency, tilt, pivot, or swivel the display, adjust its height, or shift to either portrait or landscape mode.

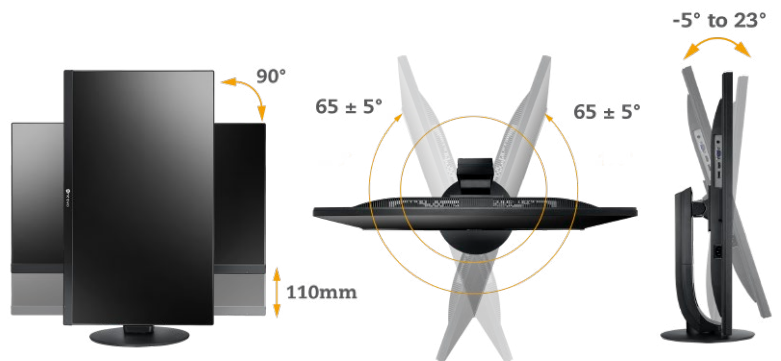

LOW BLUE LIGHT

Eye Comfort

Eye comfort figures high on the list of strengths that define the FS-Series. The flicker-free backlight and blue light filter of the FS-Series ensure a comfortable viewing experience by reducing eyestrain after long periods of use.

Features

- LED-backlit technology with 1920 x 1080 resolution
- 3-sided narrow-bezel brings more screen space for single or multi-display setups
- Wide viewing angle with colour consistence for multiple people use
- Ergonomically-designed stand: tilt, pivot, swivel, height adjustable for multiple viewing options
- DisplayPort 1.2 and HDMI inputs for Full HD connectivity with multimedia devices



Specifications

FS-27

FS-24

Panel	Panel Type	LED-Backlit TFT LCD (VA Technology)	LED-Backlit TFT LCD (IPS Technology)
	Panel Size	27.0"	23.8"
	Max. Resolution	FHD 1920 x 1080	FHD 1920 x 1080
	Pixel Pitch	0.311 mm	0.275 mm
	Brightness	300 cd/m ²	250 cd/m ²
	Contrast Ratio	20,000,000:1 (DCR)	20,000,000:1 (DCR)
Frequency (H/V)	Viewing Angle (H/V)	178°/178°	178°/178°
	Disply Colour	16.7M	16.7M
	Response Time	5 ms	5 ms
	H Freq.	30 kHz-83 kHz	30 kHz-83 kHz
	V Freq.	50 Hz-76 Hz	56 Hz-76 Hz
Input	DisplayPort	x 1	x 1
	HDMI	1.4 x 1	1.4 x 1
	VGA	15-Pin D-Sub x 1	15-Pin D-Sub x 1
Audio	Audio In	Stereo Audio Jack (3.5 mm)	Stereo Audio Jack (3.5 mm)
	Internal Speakers	2W x 2	2W x 2
Power	Power Supply	Internal	Internal
	Power Requirements	AC 100-240V, 50/60 Hz	AC 100-240V, 50/60 Hz
	On Mode	22W (On)	18W (On)
	Stand-by Mode	< 0.5W	< 0.5W
Operating Conditions	Off Mode	< 0.5W	< 0.5W
	Temperature	0°C-40°C (32°F-104°F)	0°C-40°C (32°F-104°F)
Storage Conditions	Humidity	10%-85% (non-condensing)	10%-85% (non-condensing)
	Temperature	-25°C-55°C (-13°F-131°F)	-25°C-55°C (-13°F-131°F)
Mounting	Humidity	5%-93% (non-condensing)	5%-93% (non-condensing)
	VESA FPMPMI	Yes (100 x 100 mm)	Yes (100 x 100 mm)
Stand	Tilt	-5° to 23°	-5° to 23°
	Swivel	65 ± 5°	65 ± 5°
	Height Adjustment	0-110 mm	0-110 mm
Security	Kensington Security Slot	Yes	Yes
Dimensions	w/Base (W x H x D)	611.9 x 518.7 x 249.0 mm (24.1" x 20.4" x 9.8")	540.6 x 498.6 x 249.0 mm (21.3" x 19.6" x 9.8")
	Packaging (W x H x D)	715.0 x 450.0 x 305.0 mm (28.1" x 17.7" x 12.0")	632.0 x 417.0 x 282.0 mm (24.9" x 16.4" x 11.1")
Weight	w/Base	6.6 kg (14.5 lb)	5.7 kg (12.5 lb)
	Packaging	8.9 kg (19.6 lb)	7.8 kg (17.1 lb)
Regulation Approval	Certification & Compliance	CE, CB, WEEE, RoHS, REACH, EAC	CE, CB, WEEE, RoHS, REACH, EAC
Accessories	Supplied	Power Cord, HDMI Cable, Audio Cable, Quick Start Guide, Warranty Card	Power Cord, HDMI Cable, Audio Cable, Quick Start Guide, Warranty Card
Optional Accessories		Wall Mount: PMK-01 Desk Mounts: DMC-01, ES-02 Ceiling Mount (Landscape only): CMP-01 + WMK-03 Wall Mounts (Landscape only): WMA-01, WMK-01, WMK-03	Wall Mount: PMK-01 Desk Mounts: DMC-01, ES-02 Ceiling Mount (Landscape only): CMP-01 + WMK-03 Wall Mounts (Landscape only): WMA-01, WMK-01, WMK-03

Global Headquarters

Taipei, Taiwan

EMEA Regional Headquarters

Capelle a/d IJssel, The Netherlands

North & South America Regional Headquarters

San Jose, CA, U.S.A.

Asia-Pacific Regional Headquarters

Taipei, Taiwan

Canada Sales Office

Vancouver, B.C., Canada

China Sales Office

Shanghai, China

Czech Republic Sales Office

Brno, Czech Republic

Denmark Sales Office

Støvring, Denmark

Germany Sales Office

Mechernich, Germany

Italy Sales Office

Livorno, Italy

Poland Sales Office

Warsaw, Poland

Spain Sales Office

Barcelona, Spain

Ukraine Sales Office

Lviv, Ukraine

www.agneovo.com